

Scandinavian quality  
= Reliable / durable

## VENTILATION non-electric

Working 24 hours/day  
at no extra costs

### Environmentally friendly



due to working by the use of nature's own materials : expands +retracts by heating +cooling of wax, which consists of plant oils  
(= harmless to humans even if licked, as opposed to electricity failures)

Vent openers: Product assortment

15

## Hydraulic GIGA cylinders for GIGA VENT

Load	<b>225 kg</b> / 495 Lbs
Closing power	0 kg
Piston rod movement	80 mm / 3 2/12"
Starting panel opening	adjustable to any temperature between 17 and 25°C (63-78°F)
Prior to fitting	The piston rod must be pressed back into the cylinder.

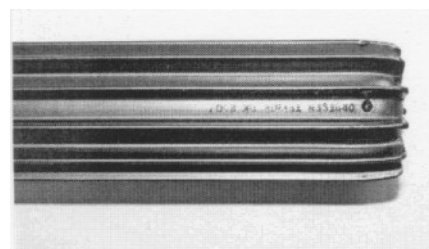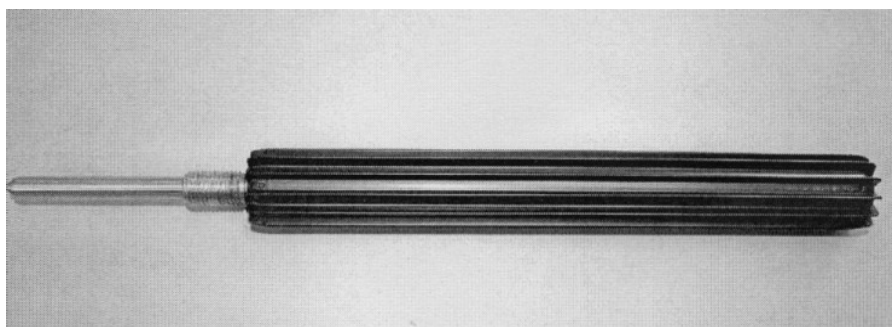

### GIGA CYLINDER

Made of aluminium, brass and stainless steel and painted black for improved heat transfer  
EAN number :  
Production year and our company name (see photo) are stamped on the cylinders.  
We give a 2-year warranty from the year stamped on the cylinder.

The GIGA cylinder is supplied only with this standard wax/oil

Cylinder wax type	Opening start can be set to	Fully open at
Standard wax/oil	17-25°C	30-32°C

The wax is a blend of vegetable oils, which are harmless to the human organism.  
If accidentally ingested (e.g. by licking one's fingers), the worst that can happen is a runny stomach.  
If wax splashes in the eye, wash immediately with tepid water.